

# Installation and Maintenance Guide

## KIT BADMINTON


Vinyl

18 02 2011

### Material delivered

2 rolls of 3.33m x 15m (=Kit Badminton)  
1 roll of blue tape 6.5cm wide and 65 linear meters long  
If ordered 2 trolleys

### Unloading the rolls

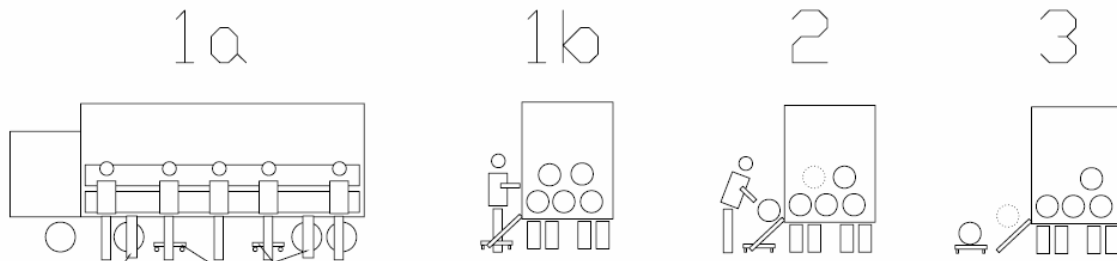


You can also unload the rolls by using a forklift fitted out with a boom attachment of 4m long

### Rolls Installation

Temperature before installation and during purpose must be between 15 to 28°C. Rolls have to be unrolled and laid flat on the floor a minimum of 12 hours prior to seaming and use.

### Roll's back description :

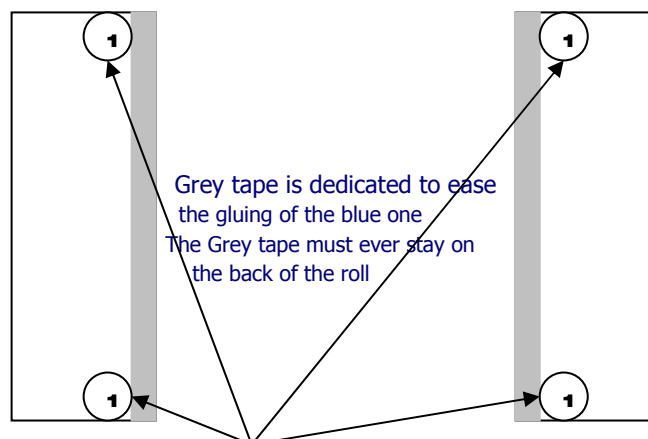

Four numbers and strips of grey tape are place on the back of the roll, when installing, those numbers and grey strips must be placed edge to edge.


# Installation and Maintenance Guide

## KIT BADMINTON

Vinyl



18 02 2011

### Roll's description

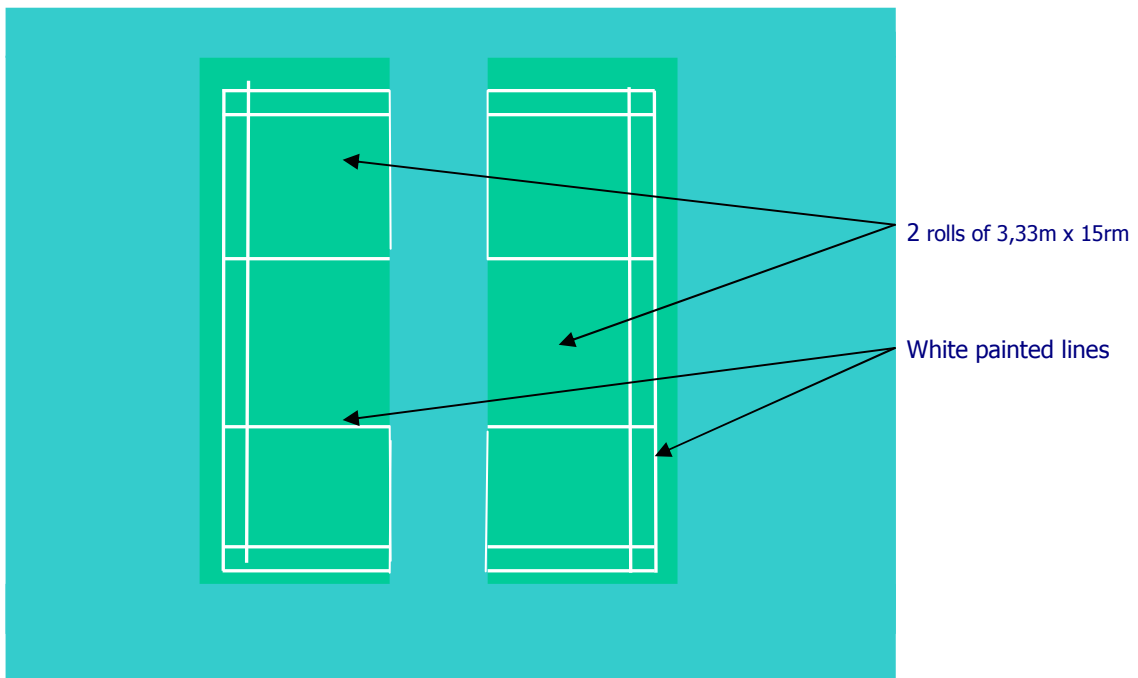

After unrolling, store the pipes, the carpet tufted protections, they will be necessary when you will remove and put away the rolls. Do not forget, the rolls have to be unrolled and laid flat on the floor a minimum of 12 hours before to seaming and use.

### Picture demonstration

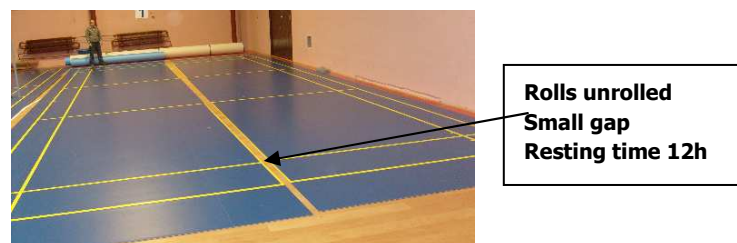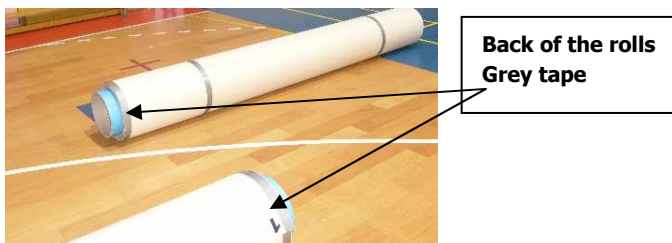

**Our game lines are white**

# Installation and Maintenance Guide

## KIT BADMINTON

Vinyl

18 02 2011

### Seaming of the rolls

Apply half of the width of the blue tape over the grey tape widthwise of the first roll, then lay the second one close to the first roll, then help the gluing of the blue tape by compressing the junction by using a roller. Do not forget, grey tape is a permanent one (not to remove), blue tape is a temporary one.

### Picture demonstration



After 12 hours resting



Put the 2  
rolls edge  
to edge



Apply half of the  
blue tape width  
under the first roll,  
the sticky part must  
be in contact with  
the grey one

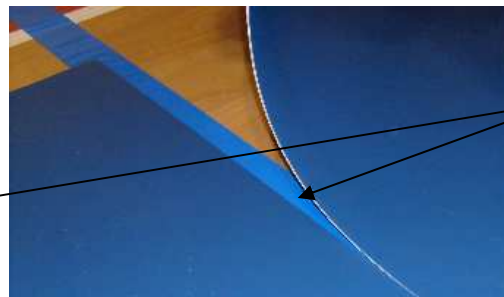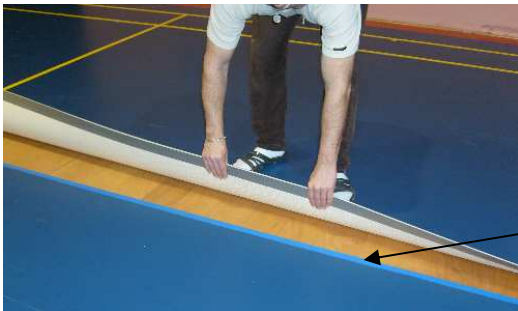

Apply the second  
roll  
Then fix the junction  
by compressing it



Cut the tape and  
turn it back

**Do not forget – our game lines are white**

# Installation and Maintenance Guide

## KIT BADMINTON

Vinyl

18 02 2011

### Maintenance of the Badminton kit

The kit has to be cleaned after, using a vacuum set. If necessary, use a Machine cleaning: use an automatic scrubber machine fitted out with white soft nylon brushes or white pads.

Recommend autoscrubber: Rotowash B60 manufactured by Rotowash Company. A neutral floor-cleaner (pH7 to 9) is convenient (dilution 1%), our advice:

**Dynatech Trophy – Tana Professional : 3 Avenue du Canada - 91940 Les Ulis**

**Tél : +331 69 18 95 30 / Fax : +331 69 28 23 54 / Email : [professionalfrance@werner-mertz.com](mailto:professionalfrance@werner-mertz.com)**

**Rotowash France : 41 rue du Mûrier - Equatop - 37540 St Cyr sur Loire**

**Tél : 02 47 41 11 10 / Fax : 02 47 41 00 15 / Email : <http://www.rotowash.fr/Groupe/index.htm>**

**Nota bene: If the kit is laid over a wooden floor be carefull with water**

### Removal of the Badminton Kit

Clean the surface of the rolls

Remove the blue tape, the grey one must remain on the back of each of the two rolls. The grey tape is dedicated to ease the gluing of the blue one and to prevent the glue located on the blue tape to get into the PVC floor, as it guarantees a good behaviour of the installed kit.

Roll up the roll on the pipe (foam directly over the pipe), pay attention to stack the external edges.

After having rolled the PVC flooring, apply the carpet all around the roll and tape it at the ends by using a black tape. Same procedure for the second roll.

Store the rolls horizontally.

### Warranty

**All portable courts are guaranteed for 5 years. Tarkett can not be charged with any fees connected to a bad unrolling, the application of a non appropriate tape, and all damages caused by a non convenient use, storage or transportation.**

*The information given in this technical specification is indicative. It is based on our knowledge and experience. It has to be considered as general maintenance rules, which cannot integrate the particular data from each installation. Therefore, it is subjected to modifications whenever required.*